indelible
BY STERLING LIGHTING

Project Name

Luminaire Type

IN27 Path Light



Product Features

- Crafted with316 Stainless Steel for Maximum Durability
- Single LED Chip for Spot-On Lux Control
- Sleek L-Shape Design for a Modern Look
- Patented Glare-Reducing Lens
- Premium Antique Bronze PVD Finish Weather-
- Resistant Design for Harsh Environments

Specifications


Rev. 08/2026

Luminaire Type: Dedicated Low Voltage LED
Color Temperature: 2700K / 3000K
Material: 316 Stainless Steel
Finish: Antique Bronze PVD Finish
Wattage: 0.85 - 3.25W
Field Angle: 154°

Lumen Output: 38 - 141 lm
Operating Voltage: 9V - 15V AC
Light Source: Bridgelux LED
Color Rendering Index: 98+
TM-30 Rf: 95
TM-30 Rg: 101

Wire Lead: 10' 18AWG
Mounting: Eagle Claw Stake (Included)
Listing: ETL, FCC
Standard: UL1838
Rating: IP65

Product Drawings

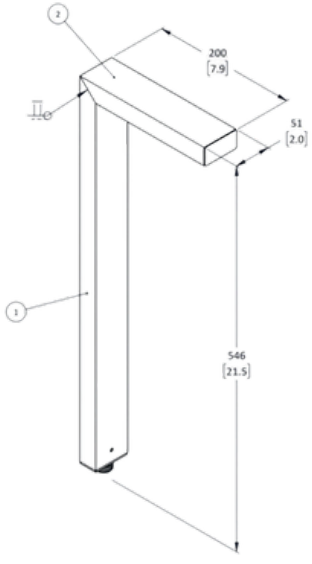

Driver at 15V Input

Settings	Lumens	VA	Lm/W
0 pins up (max)	141 lm	4.76 VA	43.40
1 pin up	75 lm	2.52 VA	46.33
2 pins up	38 lm	1.47 VA	44.36

(Pins located on driver)

Nom du projet

Type de luminaire

IN27 Path Light



Caractéristiques du produit

- Fabriqué en acier inoxydable 316 pour une durabilité maximale
- Puce LED unique pour un contrôle précis de l'éclairement
- Design élégant en forme de L pour une esthétique moderne
- Lentille brevetée réduisant l'éblouissement
- Finition PVD haut de gamme « bronze antique » et conception résistante aux intempéries pour les environnements difficiles

Caractéristiques


Rev. 08/2026

Type de luminaire : LED basse tension dédiée
Température de couleur : 2700 K / 3000 K
Matériau : Acier inoxydable 316
Finition : Finition PVD bronze antique
Puissance : 0,85 – 3,25 W
Angle de champ : 154°

Flux lumineux : 38 - 141 lm
Tension de fonctionnement : 9 V - 15 V CA
Source lumineuse : LED Bridgelux
Indice de rendu des couleurs : 98+
TM-30 Rf : 95
TM-30 Rg : 101

Câble de raccordement : 10 pi, calibre 18 AWG
Montage : Piquet « Eagle Claw » (inclus)
Homologations : ETL, FCC
Norme : UL1838
Indice de protection : IP65

Dessins du produit

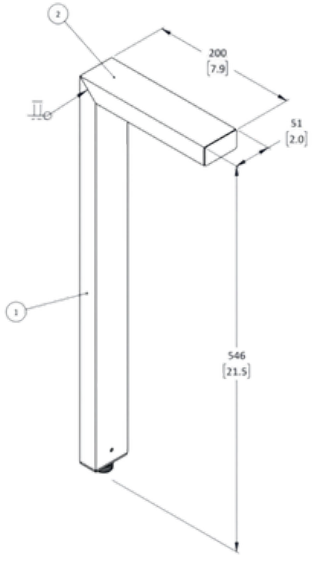

Pilote pour entrée 15 V

Paramètres	Lumens	VA	Lm/W
0 broche relevée (max.)	141 lm	4.76 VA	43.40
on épingle	75 lm	2.52 VA	46.33
2 broches vers le haut	38 lm	1.47 VA	44.36

(Broches situées sur le pilote)