


SL07 Path Light

Product Features

- Solid brass construction
- Single source LED chip for greater lux control
- Provides 16' spread of light
- Design complies with IDA guidelines for dark sky preservation
- All components are threaded together, never tack welded, for additional strength
- Hefty 1.5" diameter stem to prevent leaning after installation



Specifications

Rev. 07/2025

Luminaire Type: Dedicated Low Voltage LED

Color Temperature: 2700K / 3000K / 5000K

Material: Marine-Grade, Virgin Brass with a UV Coating

Finish: Antique Bronze or Raw Brass

Wattage: 5.5W

Field Angle: 360°

Lumen Output: 170 lm

Operating Voltage: 9V - 15V AC

Light Source: CREE LED

Color Rendering Index: 99+

TM-30 Rf: 95

TM-30 Rg: 101

Wire Lead: 10' 18AWG

Mounting: 9" ABS Plastic Stake (included)


Lens: Frosted Diffuser Lens

Listing: ETL

Standard: UL 1838

Rating: IP65

Product Drawings

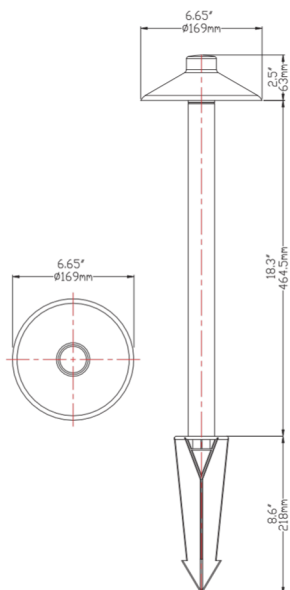


Driver at 15V Input

	Lumens	VA	Lm/W
Non-Adjustable	170 lm	7.80 VA	31.04

SL07 Path Light

Caractéristiques du produit

- Construction en laiton massif
- Puce DEL à source unique pour un meilleur contrôle de l'éclairage
- Faisceau lumineux de 16 pi
- Conforme aux directives de l'IDA pour la protection du ciel étoilé
- Composants entièrement filetés (aucune soudure ponctuelle) pour une solidité accrue
- Tige robuste de 1,5 po de diamètre pour éviter l'inclinaison après installation



Spécifications

Rev. 07/2025

Type de luminaire : DEL à basse tension dédiée

Température de couleur : 2700K / 3000K / 5000K

Matériau : Laiton vierge de qualité marine avec revêtement anti-UV

Fini : Bronze antique ou laiton brut

Puissance : 5,5 W

Angle de faisceau : 360°

Flux lumineux : 170 lm

Tension de fonctionnement :
9V – 15V CA

Source lumineuse : DEL CREE

IRC : 99+

TM-30 Rf : 95

TM-30 Rg : 101

Fil conducteur : 10 pi, 18 AWG

Montage : Piquet en plastique ABS de 9 po (inclus)


Lentille : Lentille diffusante givrée

Homologation : ETL

Norme : UL 1838

Indice de protection : IP65

Schémas du produit

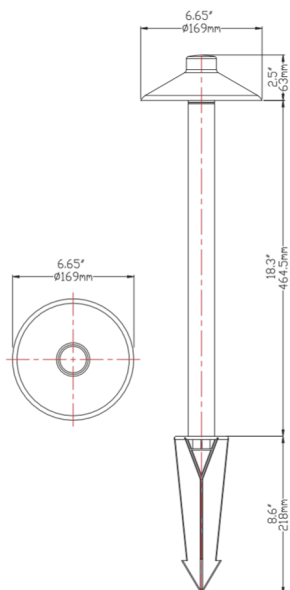

	Lumens	VA	Lm/W
Non Adjustable	170 lm	7.80 VA	31.04