STERLING LIGHTING

Project Name

Luminaire Type

SL14 Relief Light



Product Features

- Adjustable lumen output
- High-quality Bridgelux LED chips
- Patented, sleek design
- Enhanced strength from through bolt in the knuckle
- Plugs to prevent insect and moisture penetration

Specifications


Rev. 08/2026

LuminaireType: Dedicated Low Voltage LED
Color Temperature: 2700K / 3000K
Material: Marine-Grade, Virgin Brass with a UV Coating
Finish: Antique Bronze or Raw Brass
Wattage: 1.5W (min) - 10W (max)
Field Angle: 118.6°

Lumen Output: 95 lm - 623 lm
Operating Voltage: 9V - 15V AC
Light Source: Bridgelux LED
Color Rendering Index: 99+
TM-30 Rf: 97
TM-30 Rg: 101

Lead Wire: 15' 18AWG
Mounting: 9" ABS Plastic Stake
Lens: Clear glass lens
Accessories:
Listing: ETL, FCC
Standard: UL1838
Rating: IP67

Product Drawings

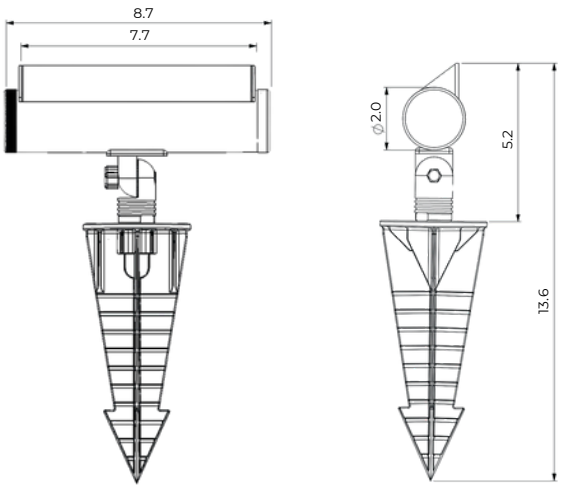

Adjustable Driver Settings at 15V Input

Settings	Lumens	VA	Lm/W
0 pins up (max)	623 lm	13.67 VA	61.37
1 pin up	499 lm	10.73 VA	64.27
2 pins up	367 lm	7.80 VA	66.07
3 pins up	271 lm	5.82 VA	65.83
4 pins up	143 lm	3.13 VA	66.23
5 pins up (min)	95 lm	2.19 VA	65.25

(Pins located on driver)

STERLING LIGHTING

Nom du projet

Type de luminaire

SL14 Relief Light

Caractéristiques du produit

- Flux lumineux réglable
- Puces LED Bridgelux de haute qualité
- Design élégant et breveté
- Robustesse accrue grâce à un boulon traversant au niveau de l'articulation
- Bouchons empêchant la pénétration d'insectes et d'humidité



Caractéristiques


Rev. 08/2026

Type de luminaire : LED basse tension dédiée
Température de couleur : 2700 K / 3000 K
Matériau : Laiton vierge de qualité marine avec revêtement anti-UV
Finition : Bronze antique ou laiton brut
Puissance : 1,5 W (min) - 10 W (max)
Angle de champ : 118,6°

Flux lumineux : 95 lm - 623 lm
Tension de fonctionnement : 9 V - 15 V CA
Source lumineuse : LED Bridgelux
Indice de rendu des couleurs : 99+
TM-30 Rf : 97
TM-30 Rg : 101

Câble d'alimentation : 15 pi (calibre 18 AWG)
Fixation : Piquet en plastique ABS de 9 po
Lentille : Verre transparent
Accessoires :
Homologations : ETL, FCC
Norme : UL1838
Indice de protection : IP67

Dessins du produit

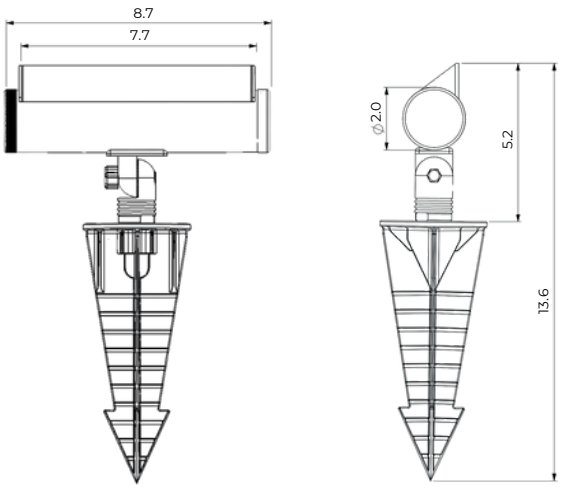

Réglages du driver ajustables pour une entrée de 15 V

Paramètres	Lumens	VA	Lm/W
0 broche relevée (max.)	623 lm	13.67 VA	61.37
1 quill debout	499 lm	10.73 VA	64.27
2 quilles debout	367 lm	7.80 VA	66.07
3 quilles debout	271 lm	5.82 VA	65.83
4 quilles debout	143 lm	3.13 VA	66.23
5 quilles debout (min)	95 lm	2.19 VA	65.25

(Broches situées sur le pilote)