STERLING LIGHTING

Project Name

Fixture Type

SL24 Flood Light



Product Features

- Adjustable lumen outputwith internal dial
- Adjustable color temperature 2700k or 3000k
- Compact size and solid brass construction
- Linear, wide-spread light with 133° field angle
- Comes standard with hex lens and 9° brass stake
- Sturdy composition including heavy-duty knuckle with through bolt

UL1838 IP65

Specifications


Rev. 08/2026

Fixture Type: Dedicated Low Voltage LED
Color Temperature: 2700K - 3000K
Material: Marine-Grade, Virgin Brass with a UV Coating
Finish: Antique Bronze
Wattage: 8.4W (min) - 8.5W (max)
Field Angle: 133.3°

Lumen Output: 521 lm - 551 lm
Operating Voltage: 9V - 15V AC
Light Source: SEOUL LEDs
Lens: Clear
Color Rendering Index: 93+
TM-30 Rg: 91
TM-30 Rg: 102

Lead Wire: 10° 18AWG
Mounting: 9° Brass Stake(included)
Listing: ETL, FCC
Standard: UL 1838
Rating: IP65

Product Drawings

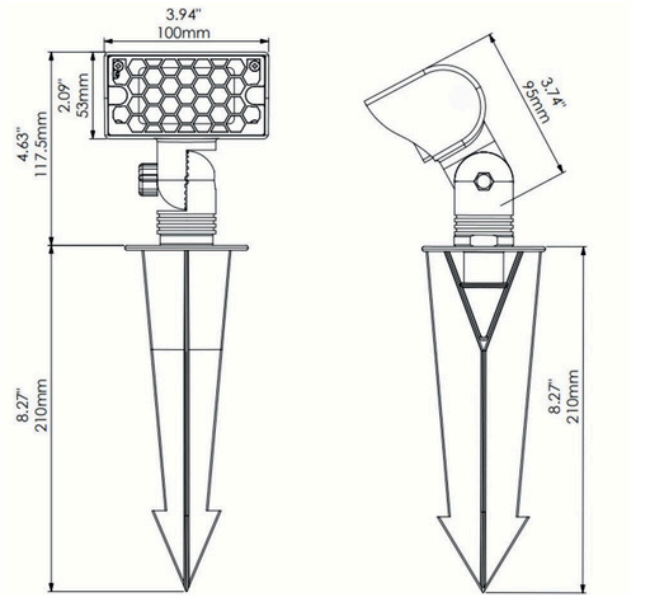

Adjustable Driver Settings at 15V Input

Settings	Lumens	VA	Lm/W
2700K	551 lm	11.13 VA	65.88
3000K	521 lm	11.32 VA	61.17

STERLING LIGHTING

Nom du projet

Type d'appareil

SL24 Flood Light



Caractéristiques du produit

- Puissance lumineuse réglable avec molette interne
- Température de couleur réglable (2700 K ou 3000 K)
- Format compact et fabrication en laiton massif
- Éclairage linéaire à large diffusion avec un angle de champ de 133°
- Livré de série avec une lentille hexagonale et un piquet en laiton de 9 pouces
- Conception robuste incluant une rotule ultra-résistante avec boulon traversant

Caractéristiques


Rev. 08/2026

Type de luminaire : Luminaire LED basse tension dédié
Température de couleur : 2700 K - 3000 K
Matériau : Laiton vierge de qualité marine avec revêtement anti-UV
Finition : Bronze antique
Puissance : 8,4 W (min) - 8,5 W (max)
Angle de champ : 133,3°

Flux lumineux : 521 lm - 551 lm
Tension de fonctionnement : 9 V - 15 V CA
Source lumineuse : LED SEOUL
Lentille : Transparente
Indice de rendu des couleurs : 93+
TM-30 Rg : 91
TM-30 Rg : 102

Fil de raccordement : 18 AWG
Montage : Piquet en laiton (inclus)
Certifications : ETL, FCC
Norme : UL 1838
Indice de protection : IP65

Dessins du produit

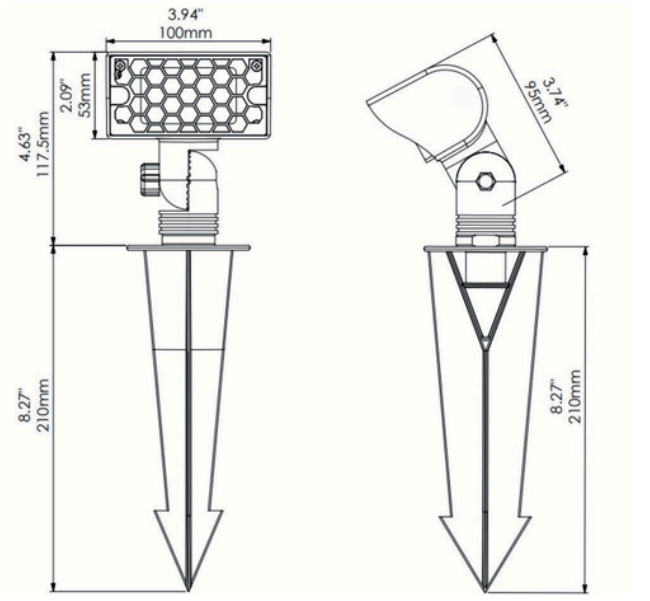

Réglages du driver ajustables pour une entrée de 15 V

Paramètres	Lumens	VA	Lm/W
2700K	551 lm	11.13 VA	65.88
3000K	521 lm	11.32 VA	61.17