

SUMMARY

Test Condition: 15V 60Hz for SL24

Setting: 1 (2700K)

Criteria	Result
Total Lumen Output (lm)	551.381
Total Power(W)	8.3698
Lamp Luminaire Efficacy (lm/W)	65.88
Power Factor	0.7517
Field Angle (°)	133.3
Correlated Color Temperature (CCT)	2676
Color Rendering Index (CRI)	91
Color Rendering Index (R ₉)	53
Fidelity Index (R _f)	90
Gamut Index (R _g)	102
Chromaticity Coordinate (x)	0.4609
Chromaticity Coordinate (y)	0.4093
Chromaticity Coordinate (u')	0.2637
Chromaticity Coordinate (v')	0.5270
In-situ Case Temperature of LED/COB (°C)	81.6
Drive Current of LED/COB (mA)	100
Projection Life Time, Reported L70 (hours)	>54000

Test Condition: 15V 60Hz for SL24

Setting: 2 (3000K)

Criteria	Result
Total Lumen Output (lm)	521.078
Total Power(W)	8.5191
Lamp Luminaire Efficacy (lm/W)	61.17
Power Factor	0.7526
Correlated Color Temperature (CCT)	2993
Color Rendering Index (CRI)	93
Color Rendering Index (R ₉)	62
Fidelity Index (R _f)	91
Gamut Index (R _g)	102
Chromaticity Coordinate (x)	0.4336
Chromaticity Coordinate (y)	0.3964
Chromaticity Coordinate (u')	0.2518
Chromaticity Coordinate (v')	0.5178

***** End of Page *****

EQUIPMENT LIST

Equipment Used	Model Number	Control Number
Fluke Temperature Meter	52	EC2357
Everfine- DC Power Supply	WY12010	EC4753-7
Everfine- AC power source for Integrating Sphere System	VPS1010 PWM	EC4760-12
Everfine - AC power source for Goniophotometer System	VPS1060 PWM	EC4753-8
Two meter integrating sphere unit	Everfine – 2M	EC4760
Everfine - Digital Power Meter	PF2010A	EC4760-10
YOKOGAWA - Digital Power Meter	WT210	EC4553
Everfine – Goniophotometer	Go-R5000	EC4753
Draught-proof enclosure	N/A	EC2201
Agilent - Data Acquisition Unit	34970A	EC2043
QINGZHI - Power Meter	8770A	EC2652
YOKOGAWA - Digital Power Meter	WT-210	EC4553

***** End of Page *****

TEST METHOD

Seasoning in Sample Orientation – LED Products

No seasoning was performed in accordance with IESNA LM-79

Light Distribution and Output Measurements

Light Distribution and total light output (luminous flux) were measured using a Go-R5000 Type-C Rotating Mirror Goniophotometer. Temperature 25°C and relative humidity of 60% was measured at a position in the testing laboratory.

The lamp rotates only around the fixed vertical axle in the prescribed burning position. The lamp and mirror permit the measurement of luminous intensity at the direction of any horizontal or vertical angle without tilting the lamp. The lamp was allowed to stabilize before measurements were made.

Chromaticity Measurements

Chromaticity was measured using a 2 meters integrating sphere spectral lamp measurement system. Temperature was measured at a position inside the sphere shielded from direct light. Relative humidity of 65% was measured at a position in the testing laboratory.

Spectral radiant flux measurements were made using spectroradiometer attached to the detector port of the integrating sphere. Each lamp was allowed to stabilize before measurements were made. The calibration of the integrating sphere spectroradiometer system is by the reference/standard lamps which are traceable to National Institute of Metrology P.R. CHINA. Lamp efficacy (lumens per watt) for each lamp model was then computed based on the luminous flux result. Electrical measurements including voltage, power and power factor were measured using YOKOGAWA - Digital Power Meter., model WT210.

Standard lamp used:

Model: Labsphere SCL-1400

Current: 2.679A

Temperature Measurement Test

The sample was operated at 25±5°C until constant temperatures were obtained. A temperature was considered constant if sample was operating for at least three hours and upon three successive readings-taken at 15 minutes intervals- were within one degree and were not rising.

Thermocouples were attached at locations described in the results by means of epoxy.

Driver current Measurement Test

During the temperature measurement test, measure the forward current for each LED package/array/module.

***** End of Page *****

RESULTS OF TESTS

Test Condition: 15V 60Hz for SL24

Setting: 1 (2700K)

Total operation burning time: 70 min

Stabilization time: 60 min

Photometric Measurements at 25°C

Intertek Sample No.	Base Orientation	Correlated Color Temperature (K)	CRI	CIE 31' Chromaticity Coordinate (x)	CIE 31' Chromaticity Coordinate (y)	CIE 76' Chromaticity Coordinate (u')	CIE 76' Chromaticity Coordinate (v')
SL24							
0240627-25-001	N/A	2676	91	0.4609	0.4093	0.2637	0.5270

Photometric and Electrical Measurements at 25°C

Intertek Sample No.	Base Orientation	Input Voltage (Vac)	Input Current (A)	Lamp Input Power (Watts)	Input Power Factor	Absolute Luminous Flux (Lumens)	Lumen Efficacy (Lumens Per Watt)
SL24							
0240627-25-001	N/A	15.0	0.7396	8.3698	0.7517	551.381	65.88

Zonal Lumen Summary and Percentages at 25°C

Zone	Lumens (lm)	% Luminaire (%)
SL24		
0-30	177.465	32.19
0-40	292.307	53.01
0-60	486.600	88.25
0-90	551.380	100.00
0-180	551.381	100.00

Beam Angle

	Horizontal Spread (°)	Vertical Spread (°)
SL24		
Beam (50%)	113.7	101.5
Beam Angle	107.6	

***** End of Page *****


RESULTS OF TESTS (cont'd)

Intensity (Candlepower) Summary at 25°C – Candelas

Test Condition: 15V 60Hz for SL24

Setting: 1 (2700K)

G \ C(°)	0	22.5	45	67.5	90
0	225.60	225.60	225.60	225.60	225.60
5	223.82	224.23	224.95	225.50	225.90
10	220.29	221.20	222.49	223.72	224.64
15	215.17	216.46	218.35	220.14	221.60
20	208.17	209.80	212.21	214.80	216.63
25	199.57	201.37	204.43	207.25	209.44
30	189.22	191.13	194.61	196.86	198.49
35	177.17	179.24	182.63	182.66	183.26
40	163.51	165.81	167.73	164.22	162.65
45	148.03	150.48	149.37	139.04	91.02
50	130.89	133.14	127.32	24.11	5.55
55	110.92	112.86	96.03	2.20	0.52
60	88.81	69.08	3.93	0.16	0.11
65	60.82	30.86	0.20	0.04	0.00
70	29.55	3.44	0.00	0.00	0.00
75	7.00	0.13	0.00	0.00	0.00
80	0.27	0.00	0.00	0.00	0.00
85	0.04	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00

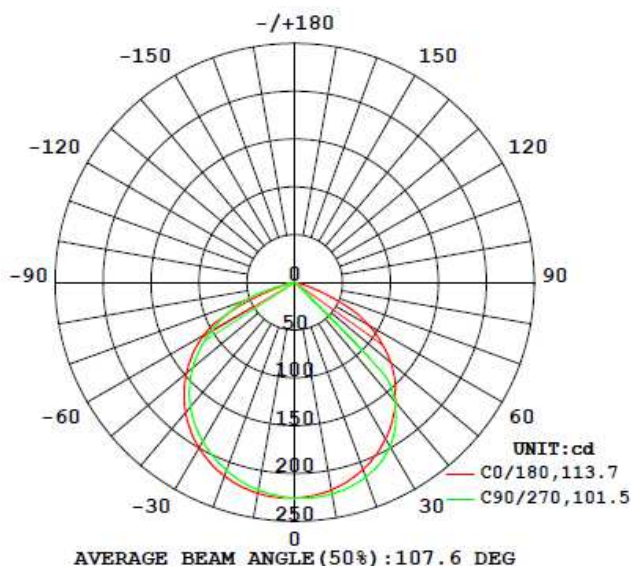

***** End of Page *****


RESULTS OF TESTS (cont'd)

Test Condition: 15V 60Hz for SL24
Setting: 1 (2700K)

Illumination Plots

Model No.: SL24
Mount Height: 10 m

Illuminance - Cone of Light

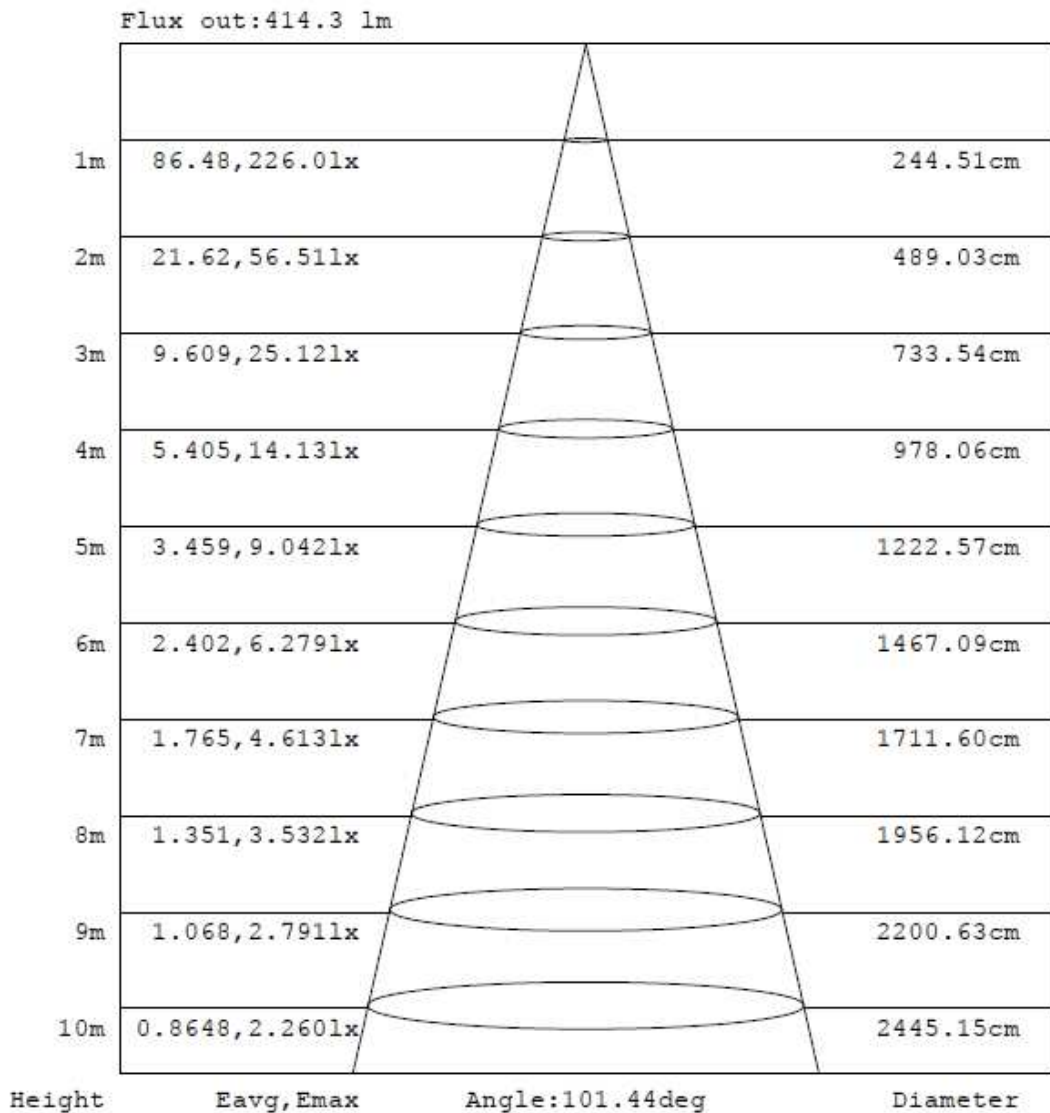

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.


***** End of Page *****

RESULTS OF TESTS (cont'd)

Test Condition: 15V 60Hz for SL24

Setting: 1 (2700K)

Model No.: SL24
Mount Height: 20 m
Isoillumination Plot

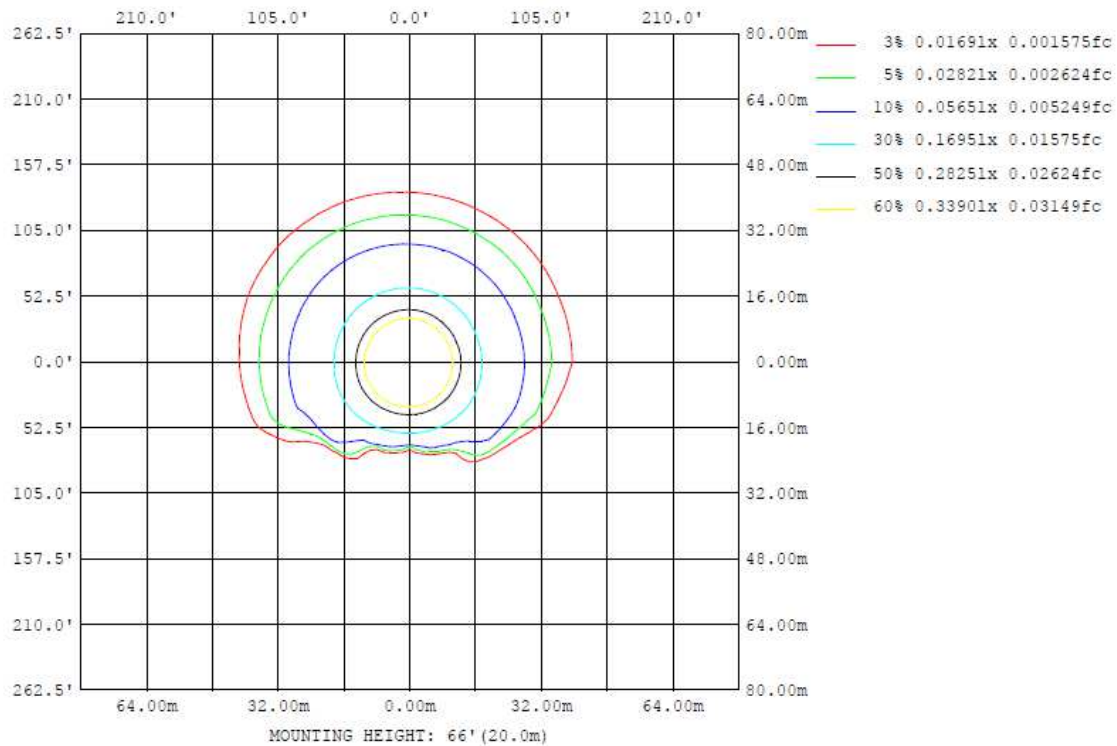

***** End of Page *****

RESULTS OF TESTS (cont'd)

Test Condition: 15V 60Hz for SL24

Setting: 1 (2700K)







ANSI/IES TM-30-18 Color Rendition Report

Source: LED

Manufacturer: STERLING LIGHTING LLC

Date: 6/27/2024

Model: SL24

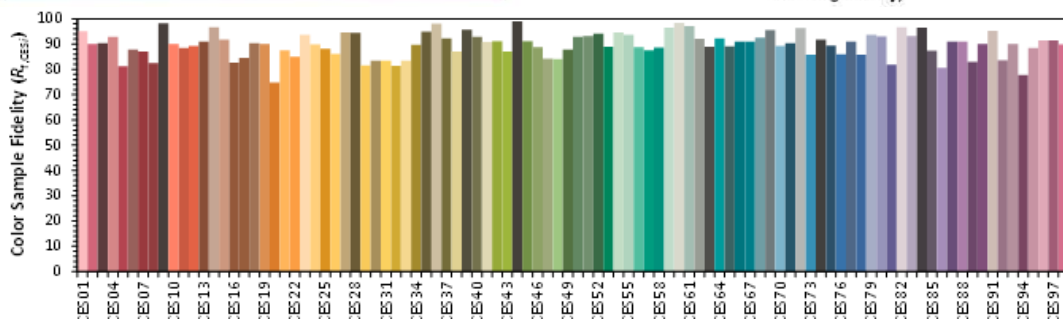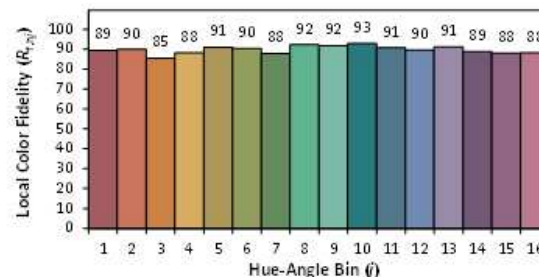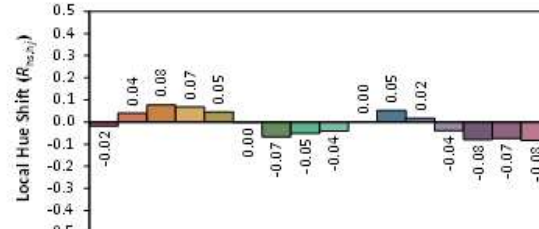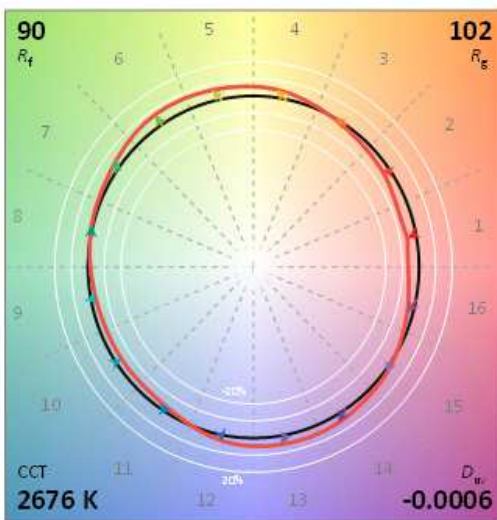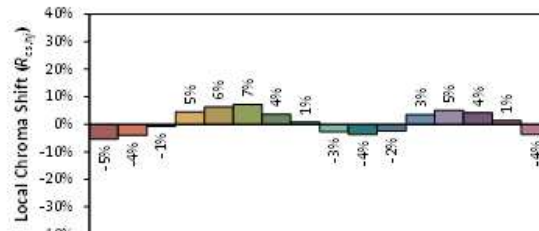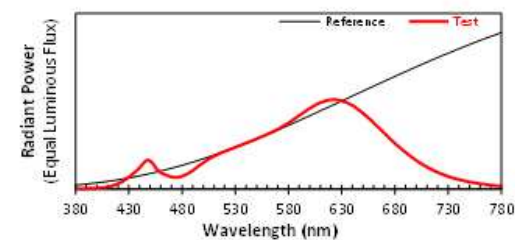

Notes: This is a recommended method for displaying ANSI/IES TM-30-18 information.

x 0.4609
y 0.4093
u' 0.2637
v' 0.5270

CIE 13.3-1995
(CRI)

R_a 91
R_s 53

***** End of Page *****

RESULTS OF TESTS (cont'd)

Test Condition: 15V 60Hz for SL24

Setting: 2 (3000K)

Total operation burning time: 70 min

Stabilization time: 60 min

Photometric Measurements at 25°C

Intertek Sample No.	Base Orientation	Correlated Color Temperature (K)	CRI	CIE 31' Chromaticity Coordinate (x)	CIE 31' Chromaticity Coordinate (y)	CIE 76' Chromaticity Coordinate (u')	CIE 76' Chromaticity Coordinate (v')
SL24							
0240627-25-001	N/A	2993	93	0.4336	0.3964	0.2518	0.5178

Photometric and Electrical Measurements at 25°C

Intertek Sample No.	Base Orientation	Input Voltage (Vac)	Input Current (A)	Lamp Input Power (Watts)	Input Power Factor	Absolute Luminous Flux (Lumens)	Lumen Efficacy (Lumens Per Watt)
SL24							
0240627-25-001	N/A	15.0	0.7522	8.5191	0.7526	521.078	61.17

Zonal Lumen Summary and Percentages at 25°C

Zone	Lumens (lm)	% Luminaire (%)
SL24		
0-30	178.797	34.31
0-40	293.037	56.24
0-60	482.350	92.57
0-90	521.056	100.00
0-180	561.078	100.00

Beam Angle

	Horizontal Spread (°)	Vertical Spread (°)
SL24		
Beam (50%)	113.9	92.4
Beam Angle	103.1	

***** End of Page *****


RESULTS OF TESTS (cont'd)

Intensity (Candlepower) Summary at 25°C – Candelas

Test Condition: 15V 60Hz for SL24

Setting: 2 (3000K)

G \ C(°)	0	22.5	45	67.5	90
0	227.79	227.79	227.79	227.79	227.79
5	225.94	226.30	227.08	227.76	228.29
10	222.32	223.30	224.82	226.35	227.63
15	216.97	218.58	221.18	223.46	225.22
20	210.21	212.21	215.56	218.69	220.98
25	201.65	204.28	208.31	212.11	214.97
30	191.21	194.29	199.31	203.89	207.34
35	179.01	182.47	188.48	193.77	197.53
40	165.15	169.15	175.72	181.42	185.67
45	149.67	153.93	160.95	166.59	169.59
50	132.36	136.60	144.31	145.92	49.27
55	112.11	116.55	124.24	10.53	1.09
60	89.46	83.19	47.98	0.07	0.02
65	64.66	37.68	0.27	0.00	0.00
70	38.00	5.12	0.00	0.00	0.00
75	12.45	0.19	0.00	0.00	0.00
80	1.11	0.00	0.00	0.00	0.00
85	0.02	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00

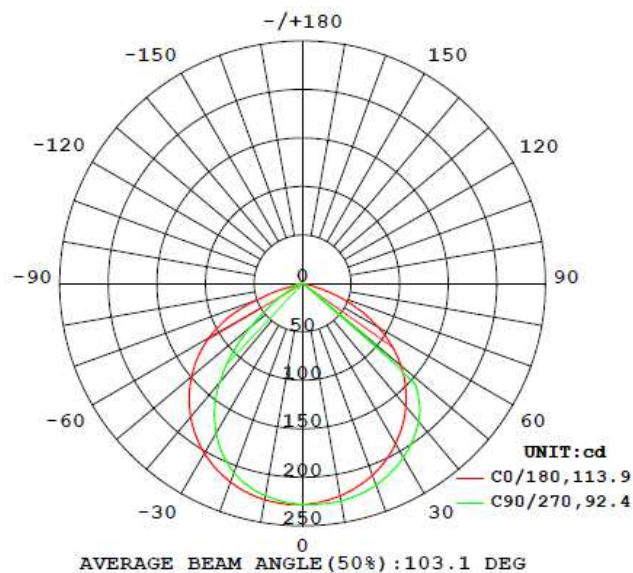

***** End of Page *****

RESULTS OF TESTS (cont'd)

Test Condition: 15V 60Hz for SL24

Setting: 2 (3000K)


Illumination Plots

Model No.: SL24

Mount Height: 10 m

Illuminance - Cone of Light

Flux out: 374.6 lm

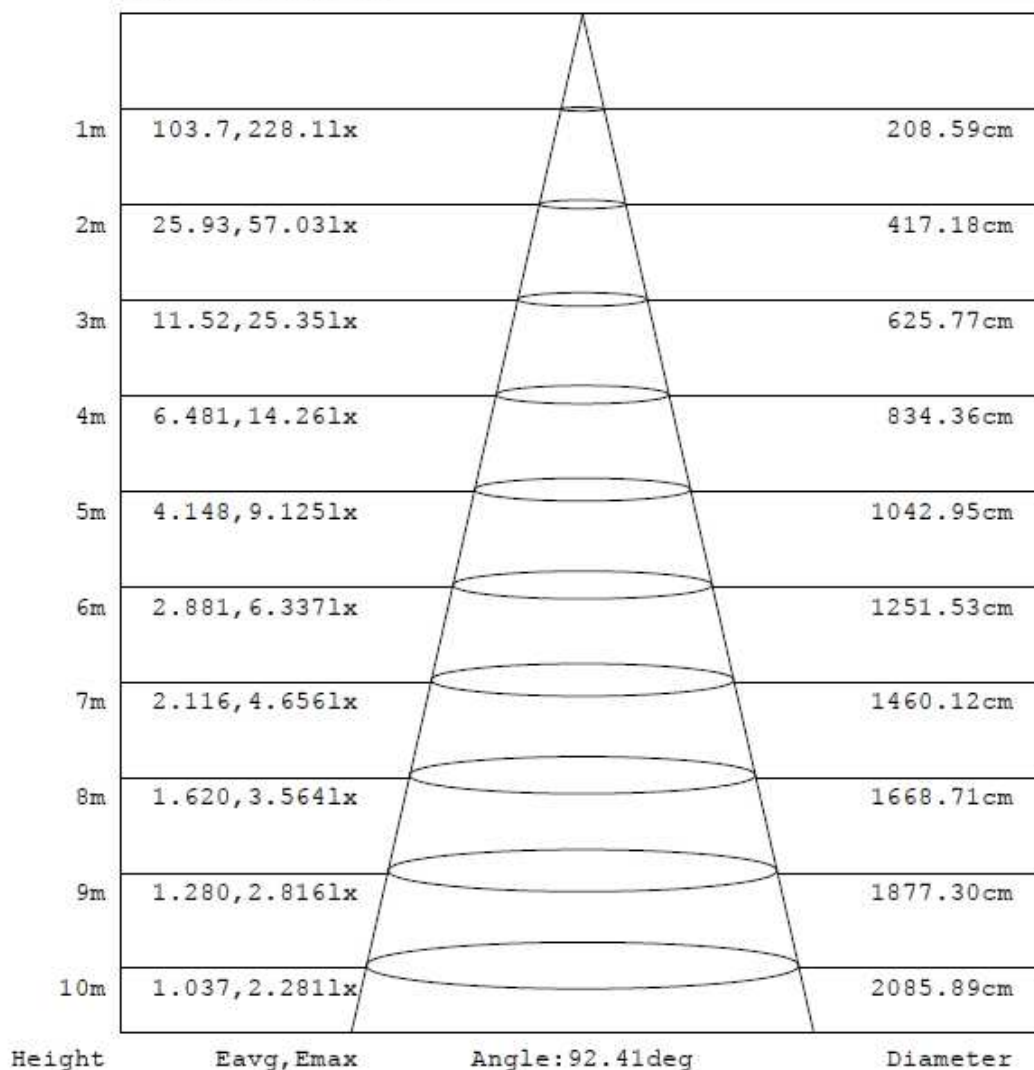


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

***** End of Page *****

RESULTS OF TESTS (cont'd)

Test Condition: 15V 60Hz for SL24
Setting: 2 (3000K)

Model No.: SL24
Mount Height: 20 m
Isoillumination Plot

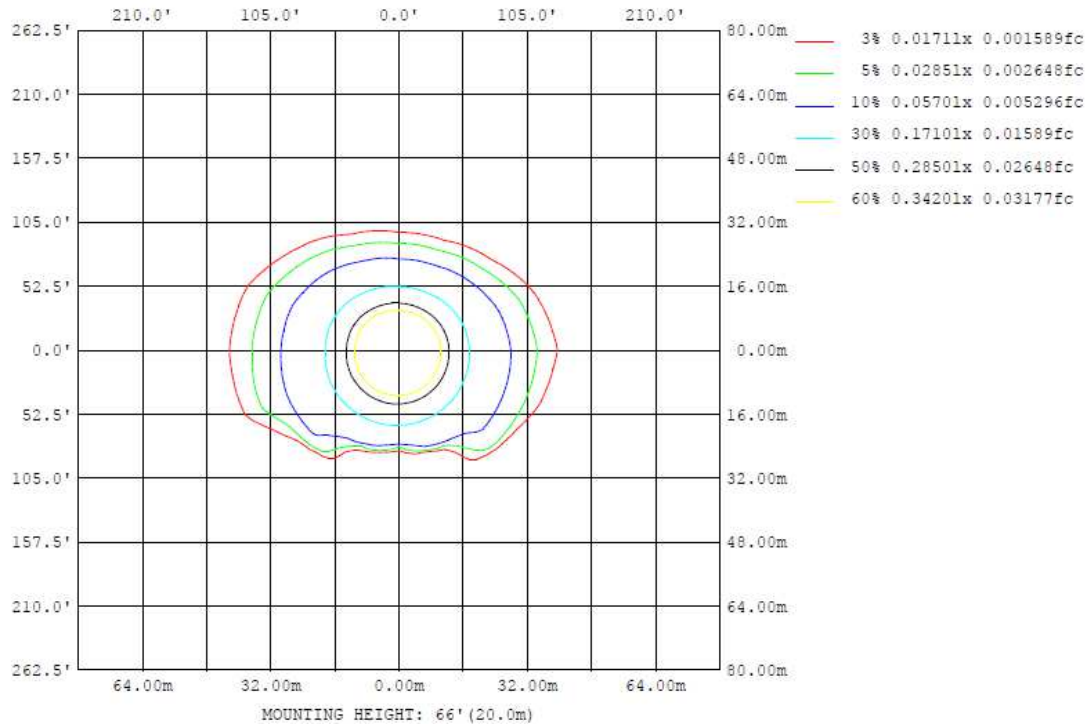

***** End of Page *****

RESULTS OF TESTS (cont'd)

Test Condition: 15V 60Hz for SL24

Setting: 2 (3000K)







ANSI/IES TM-30-18 Color Rendition Report

Source: LED

Manufacturer: STERLING LIGHTING LLC

Date: 6/27/2024

Model: SL24

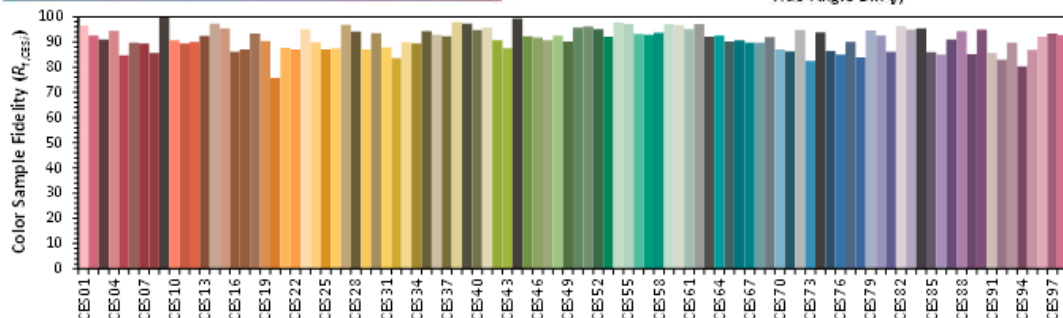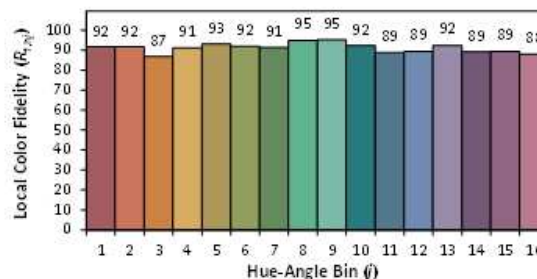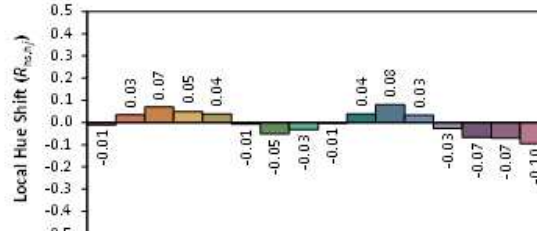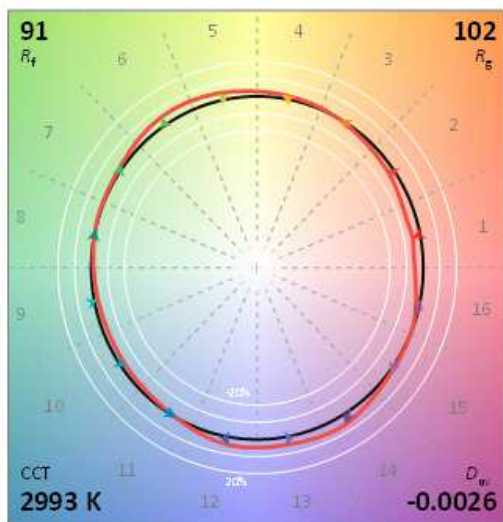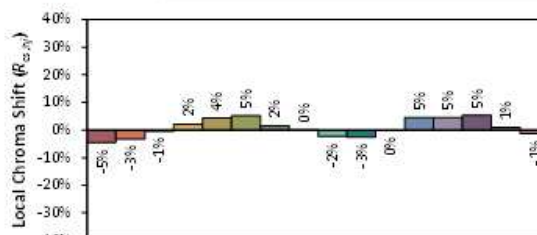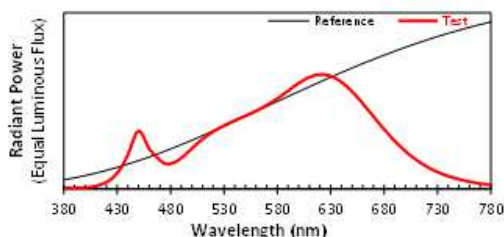

Notes: This is a recommended method for displaying ANSI/IES TM-30-18 information.

x 0.4336

y 0.3964

u' 0.2518

v' 0.5178

CIE 13.3-1995
(CRI)

R_a 93

R_g 62

***** End of Page *****

RESULTS OF TESTS (cont'd)

IN SITU TEMPERATURE MEASUREMENT TEST

Test Results of LED chip temperature and current

TMP led: SAW9A32E-E1	
In-situ case temperature of LED source (°C)	Limit single led chip temperature(°C)
81.6	105
Measured Drive current for each LED package/array/module (mA)	Limit single led chip current (mA)
100	100

Note: In-situ case temperature was corrected to ambient temperature at 25°C in above table.

***** End of Page *****

RESULTS OF TESTS (cont'd)

IN SITU TEMPERATURE MEASUREMENT TEST

Lumen Maintenance Life Projection (Cont'd) - led chip point 1

The Calculation is based on the Illumination Engineering Society's TM-21-11: Projecting Long Term Lumen Maintenance of LED Light Sources.

Table 1: Report at each LM-80 Test Condition					
Description of LED Light Source Tested (manufacturer, model, catalog number)		Manufacturer: Seoul Semiconductor Co., Ltd. Model: SAW9A32E-E1 Report Number: I-151012-81-K-04 Issued: Dec. 12, 2016			
		Test Condition 1 - 55°C Case Temp	Test Condition 2 - 85°C Case Temp	Test Condition 3 - 105°C Case Temp	
Sample size	20	Sample size	20	Sample size	20
Number of failures	0	Number of failures	0	Number of failures	0
DUT drive current used in the test (mA)	100	DUT drive current used in the test (mA)	100	DUT drive current used in the test (mA)	100
Test duration (hours)	9,000	Test duration (hours)	9,000	Test duration (hours)	9,000
Test duration used for projection (hour to hour)	4,000 - 9,000	Test duration used for projection (hour to hour)	4,000 - 9,000	Test duration used for projection (hour to hour)	4,000 - 9,000
Tested case temperature (°C)	55	Tested case temperature (°C)	85	Tested case temperature (°C)	105
α	3.082E-06	α	5.102E-06	α	6.051E-06
B	1.012	B	1.018	B	1.016
Reported L70(9k) (hours)	>54000	Reported L70(9k) (hours)	>54000	Reported L70(9k) (hours)	>54000

Table 2: Interpolation Report (projection based on in-situ temperature entered)	
$T_{s,1}$ (°C)	55.00
$T_{s,1}$ (K)	328.15
α_1	3.082E-06
B_1	1.012
$T_{s,2}$ (°C)	85.00
$T_{s,2}$ (K)	358.15
α_2	5.102E-06
B_2	1.018
E_{θ}/k_{θ}	1.97E+03
A	1.264E-03
B_{θ}	1.015
$T_{s,i}$ (°C)	81.60
$T_{s,i}$ (K)	354.75
α_i	4.839E-06
Reported L70(9k) at 81.6°C (hours)	>54000

In-Situ Inputs	
Drive current for each LED package/array/module (mA):	100
In-situ case temperature ($T_{s,i}$ °C):	81.6
Percentage of initial lumens to project to (e.g. for L_{70} , enter 70):	70

Results	
Time (t) at which to estimate lumen maintenance (hours):	50,000
Lumen maintenance at time (t) (%):	79.66%
Reported L70 (hours):	>54000

***** End of Page *****